

SPECIFICATION GUIDE

TRUST MULTIKWIK



The **Multikwik** specification guide offers details about our wide range of sanitary products, traps WC connectors, floor drainage solutions and more.

In every product we manufacture we aim to meet the **Multikwik** benchmark standards of:

- **Reliability**
- **Simplicity**
- **Speed of installation**
- **Problem solving features**

Some very simple reasons why you can

TRUST MULTIKWIK



Sales hotline
01622 852 654

Support hotline
01622 852 798

Email
info@multikwik.com

Twitter
[@multikwik](https://twitter.com/multikwik)



TRUST MULTIKWIK

April 2016

WWW.MULTIKWIK.COM

Multikwik® WC CONNECTORS

FLEXIBILITY YOU CAN TRUST

At Multikwik we take great pride in plumbing and offer innovative products that are capable of giving you that little bit of extra help.

Thanks to the flexible EVA and reliable TPE seals, the Multikwik WC connectors allow for imperfect pipes and spigots, while still ensuring a watertight joint past the point of installation – ideal for tolerating movement and WC load bearing pressures. The seals and multidepth fins give additional peace of mind for a secure seal.

Multikwik were pioneers 50 years ago, with the introduction of a flexible WC connector and we're proud to say that we are still the name asked for by plumbers. Trust Multikwik to be your first choice for WC connectors.

WC Connectors

Our comprehensive range is one of the largest on the market, and covers spigots of 74mm – 114mm, ensuring an accurate fit, regardless of the make and model of sanitary chinaware.

Selecting the right WC connector

Measure the
OUTER diameter
of your spigot.



Measure the
INNER diameter
of your pipe.



Then take a look at the
dimensions provided for
the individual connectors
to find the best matches.

Know your WC pan spigot

KEY	SIZE	PIPE SUITABILITY	BRITISH STANDARD
PAGE: 58-69	97-108 mm	Modern & New Pans	BS 5503 & BS 5504
PAGE: 69-71	108-114 mm	Old & Syphonic Pans	BS 1213
PAGE: 72-73	76-95 mm	Stainless Steel Pans	—

Know your pipe


KEY	SIZE	PIPE SUITABILITY	BRITISH STANDARD
STANDARD ①	99-105 mm	uPVC / Clay / Cast Iron	BS 4514/BS 4660/ BS 65/BS 416
CAST IRON ②	88-92 mm	Traditional Cast Iron	—
OLD ③	74-77 mm	—	—
COPPER ④	105-108 mm	Copper	—

All WC connectors are made to fit pans conforming to BS 5503 and BS 5504, including ones with bosses.

**PROBLEM
SOLVED**

90° space saver bend
MKBAR90

- Can be cut horizontally and vertically to suit, seals slide back on once cut
- Ideal for replacing old BS1213 'S' trap pans

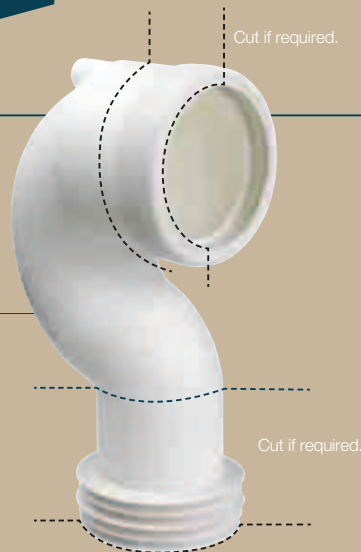

**PROBLEM
SOLVED**

Soil pipe extension
MKEA

- Can be cut to required length
- Ideal when removing 4" cast iron, clay and PVCu



**PROBLEM
SOLVED**

Multilink
MKL1

- Sleeves the fins of all 99 – 105mm Multikwik WC connector outlets, allowing a direct connection to another WC connector
- Ideal for the most unusual installations



**PROBLEM
SOLVED**

**Multiclik flexible
straight WC connector**
MKC2

- Extends from 225 to 550mm
- Superior quality hose
- Retains its position whatever shape is required
- Ideal for installing back to the wall, floor standing pans



**PROBLEM
SOLVED**

**90° bend flexible WC
connector**
MKC2B90

- Extends from 375 to 710mm
- Converts a 'P' trap into an 'S' trap with adjustment for final connection
- Superior quality hose
- Retains its position whatever shape is required



**PROBLEM
SOLVED**

90° bend flexible WC connector with boss
MKC2BB90

- Extends from 405 to 740mm
- Converts a 'P' trap into an 'S' trap with adjustment for final connection
- Superior quality hose
- Retains its position whatever shape is required




WC CONNECTORS / MODERN

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

STRAIGHT

MKS2

1




- Known as the No.2 – the plumbers favourite
- This connector is for new style pans only

EXTENDED STRAIGHT

MKS4


1



LONG ADJUSTABLE STRAIGHT

MKLAS1

1




- Can be cut to suit
- This connector is for new style pans only

STRAIGHT – INCL. VENT BOSS

MKSB4

1



- 40mm vent boss

18MM OFFSET

MKO2

1



REASONS TO TRUST MULTIKWIK

Sealing flanges



When connecting a WC connector to the pan spigot, the sealing flanges must be pushed inside with the pipe.

Don't pull the other sealing flange out over the top of the pan spigot – it may lead to leaks.



MKS1 vs MKS2

It's easy to get it right!

When you install a new toilet, in a new build development, you should use a MKS2 WC connector. When you refurbish an old toilet, you need to use a MKS1 WC connector (see page 69).

Use MKS1 on an installation, where it's been DONE!

Use MKS2 on an installation, where it's all NEW!

TRUST MULTIKWIK

Since its inception Multikwik has revolutionised plumbing in the UK. It was one of the first companies to support the use of plastics in plumbing. The innovative EVA WC connectors first introduced to the UK by Multikwik provided plumbers with a solution to a long standing plumbing problem.

PRODUCT CODE	MKS2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.16
DIMENSIONS (mm) A x B x C	43 x 52 x 15

PRODUCT CODE	MKS4
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) A x B x C	43 x 105 x 70

PRODUCT CODE	MKLA51
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.46
DIMENSIONS (mm) A x B x C	40 x 285 x 255

PRODUCT CODE	MKSB4
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.22
DIMENSIONS (mm) A x B x C	42 x 104 x 70

PRODUCT CODE	MKO2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	45 x 70 x 20

WC CONNECTORS / MODERN


KEY:  Adjustable

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm

40MM OFFSET

MK04


1



MULTICLIK – FLEXIBLE STRAIGHT

MKC2

 1




- Extends from 225 to 550mm
- Superior quality hose retains its position whatever shape is required
- Ideal when installing back to the wall, floor standing pans

MULTICLIK 90° BEND

MKC2B90

 1




- Extends from 375 to 710mm
- Superior quality hose retains its position whatever shape is required
- Converts a 'P' trap into an 'S' trap with adjustment for final connection

MULTICLIK 90° BEND INCL. BOSS

MKC2BB90

 1



- Extends from 405 to 740mm
- Superior quality hose retains its position whatever shape is required
- Converts a 'P' trap into an 'S' trap with adjustment for final connection
- To be installed in a vertical position

REASONS TO TRUST MULTIKWIK

Multiclik connector



Retains its position whatever shape is required.

Extends from 225 to 550mm.

Flexible ends for excellent joint quality.

PRODUCT CODE	MK04
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) A x B x C	43 x 85 x 43

PRODUCT CODE	MKC2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.37
DIMENSIONS (mm) A x B x C	50 x 170 x 120

PRODUCT CODE	MKC2B90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.57
DIMENSIONS (mm) A x B x C	50 x 270 x 110

PRODUCT CODE	MKC2BB90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.59
DIMENSIONS (mm) A x B x C	50 x 265 x 105

TRUST MULTIKWIK

All Multikwik fins have been designed to be multi depth – to give tolerance on connection to pipe – ensuring a reliable connection to all pipe sizes and materials.




WC CONNECTORS / MODERN

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

14° BEND

MKB114


1



45° BEND

MKB45

1




■ Ideal for corner installations

104° BEND

MKB21104


1



90° BEND

MKB2190


1



90° BEND – INCL. VENT BOSS

MKBB2190

1


 ■ 40mm vent boss
 ■ Must be used in a vertical position if boss is being used.

PRODUCT CODE	MKB114
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) A x B x C	43 x 80 x 30

PRODUCT CODE	MKB45
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.19
DIMENSIONS (mm) A x B x C	43 x 100 x 60

PRODUCT CODE	MKB21104
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) A x B x C	60 x 110 x 34

PRODUCT CODE	MKB2190
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.30
DIMENSIONS (mm) A x B x C	60 x 115 x 80

PRODUCT CODE	MKBB2190
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.31
DIMENSIONS (mm) A x B x C	60 x 110 x 65

 +
 REASONS TO
 TRUST MULTIKWIK

 Make sure you know
 your pans and spigots


Pan dimensions

 97 – 108mm Modern Pans
 108 – 114mm Old Pans
 76 – 96mm Stainless Steel

Spigot sizes

- 1 99 – 105mm Standard
- 2 88 – 92mm Cast Iron
- 3 74 – 77mm Old
- 4 105 – 108mm Copper

 +
 Multilink

 Multilink is a unique fitting which
 sleeves the fins of all 99 – 105mm
 outlet Multikwik pan connectors.
 Enabling direct connection to be made
 to the inlet of another pan connector.


See page 75 for Multilink.

TRUST MULTIKWIK

 Don't worry if your pipe or spigot
 aren't true – Multikwik WC
 connectors are made from EVA
 and are designed to be flexible.


WC CONNECTORS / MODERN

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

90° BEND – TALL

MKB3190


1



90° BEND – INCL. BOSS

MKBB3190

1



- Includes 40mm compression boss
- Must be used in a vertical position if boss is being used

90° SPACE SAVER BEND

MKBAR90

1




- Ideal when replacing old BS1213 'S' trap pans
- Can be cut to suit both horizontally and vertically

RIGID 18MM OFFSET

MKR02


1



RIGID 14° BEND

MKRB14


1



REASONS TO TRUST MULTIKWIK

Space Saver Bend

Can be cut to suit both horizontally and vertically.



Soil Pipe Extensions

Available for 4", 3½" and 3" a Multikwik Soil Pipe Extension can be cut to required length, removing the unsightly existing pipe within the bathroom.



See page 74 for Pipe Extensions.

TRUST MULTIKWIK

British Standards state that a solid ball of 80mm must pass through pipework unaided. All Multikwik WC connectors including those with boss upstands meet this requirement, reducing the chance of blockage and expensive remedial costs.

PRODUCT CODE	MKB3190
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.36
DIMENSIONS (mm) A x B x C	43 x 200 x 90

PRODUCT CODE	MKBB3190
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.35
DIMENSIONS (mm) A x B x C	43 x 200 x 70

PRODUCT CODE	MKBAR90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.38
DIMENSIONS (mm) A x B x C	34 x 255 x 91

PRODUCT CODE	MKR02
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.20
DIMENSIONS (mm) A x B x C	35 x 80 x 35

PRODUCT CODE	MKRB14
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.20
DIMENSIONS (mm) A x B x C	40 x 105 x 40


WC CONNECTORS / MODERN

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

RIGID 90° BEND

MKRB90


1



RIGID STRAIGHT

MKRS2


1



RIGID 100MM OFFSET

MKO100

1




■ Adjustable length: remove the fined seal and cut with a fine tooth saw

 EXTENDED STRAIGHT
FOR 3½" SOIL

MKS7

2




■ Extension length: 15mm

 18MM OFFSET
FOR 3½" SOIL


MKO7

2



 +
REASONS TO
TRUST MULTIKWIK

SEALING FLANGES

When connecting a WC connector to the pan spigot, the sealing flanges must be pushed inside with the pipe.



Don't pull the other sealing flange out over the top of the pan spigot – it may lead to leaks.



TRUST MULTIKWIK

 Our Technical team can help you with any questions you may have – just give us a call on 01622 852 695 or send us an email to info@multikwik.com. You can even tweet your question to @multikwik.

PRODUCT CODE	MKRB90
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.33
DIMENSIONS (mm) A x B x C	37 x 210 x 50

PRODUCT CODE	MKRS2
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.20
DIMENSIONS (mm) A x B x C	37 x 75 x 30

PRODUCT CODE	MKO100
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.26
DIMENSIONS (mm) A x B x C	40 x 207 x 26

PRODUCT CODE	MKS7
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	41 x 70 x 15

PRODUCT CODE	MKO7
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.15
DIMENSIONS (mm) A x B x C	34 x 77 x 30

WC CONNECTORS / MODERN

18MM OFFSET
OLD BS1213 PANS TO
OVERSIZE SOIL

MK01S

4

14° BEND
FOR OVERSIZE SOIL

MKB114S

4

90° BEND
FOR OVERSIZE SOIL

MKB2190S

4

WC CONNECTORS / OLD

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

STRAIGHT

MKS1

1

STRAIGHT
OLD BS1213 SYPHONIC PANS







MKS1A

1

18MM OFFSET
OLD BS1213 PANS

MK01

1



- Known as the No.1 – the plumbers favourite
- This connector is for old style pans only – for new pans use an MKS2 (see page 58)

PRODUCT CODE	MK01S
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.18
DIMENSIONS (mm) A x B x C	45 x 76 x 20

PRODUCT CODE	MKB114S
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.20
DIMENSIONS (mm) A x B x C	43 x 80 x 35

PRODUCT CODE	MKB2190S
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.32
DIMENSIONS (mm) A x B x C	60 x 115 x 80

PRODUCT CODE	MKS1
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.16
DIMENSIONS (mm) A x B x C	44 x 67 x 15

PRODUCT CODE	MKS1A
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	40 x 70 x 15

PRODUCT CODE	MK01
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.17
DIMENSIONS (mm) A x B x C	45 x 70 x 25

WC CONNECTORS / OLD

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

 90° TIGHT
KNUCKLE BEND
OLD BS1213 PANS

MKB21

1

 90° TIGHT
KNUCKLE BEND
OLD BS1213 PANS

MKB22

1

 STRAIGHT
3½" SOIL

MKS3

2

 18MM OFFSET
OLD BS1213 PANS TO 3½" SOIL

MK03

2

 STRAIGHT
3" SOIL







MKS10

3

 90° TIGHT
KNUCKLE BEND
OLD BS1213 PANS TO OVERSIZE SOIL

MKB21S

4



PRODUCT CODE	MKB21
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) A x B x C	45 x 80 x 80

PRODUCT CODE	MKB22
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) A x B x C	45 x 80 x 75

PRODUCT CODE	MKS3
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.16
DIMENSIONS (mm) A x B x C	41 x 70 x 10

PRODUCT CODE	MK03
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.15
DIMENSIONS (mm) A x B x C	37 x 78 x 30

PRODUCT CODE	MKS10
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	74 – 77
WEIGHT (KG)	0.16
DIMENSIONS (mm) A x B x C	35 x 86 x 12

PRODUCT CODE	MKB21S
PAN SPIGOT OUTER DIAMETER (mm)	108 – 114
SOIL PIPE INNER DIAMETER (mm)	105 – 108
WEIGHT (KG)	0.25
DIMENSIONS (mm) A x B x C	45 x 75 x 60


WC CONNECTORS / STAINLESS STEEL

PIPE 1 : Standard 99-105mm 2 : Cast Iron 88-92mm 3 : Old 74-77mm 4 : Copper 105-108mm:

 STRAIGHT
UNDERSIZE SPIGOTS


MKS5

1


 EXTENDED STRAIGHT
UNDERSIZE SPIGOTS

MKS8

1




■ Extension length: 59mm

 18MM OFFSET
UNDERSIZE SPIGOTS


MKO5

1


 14° BEND
UNDERSIZE SPIGOTS


MKB514

1


 14° BEND
UNDERSIZE SPIGOTS TO 3½" SOIL

MKB614

2


 +
REASONS TO
TRUST MULTIKWIK

Need an offset?

Measure from the centre line of your pipe to the centre line of your pan spigot.

Remember, offsets should not be installed in an upwards position. Water should be able to run horizontally or down.



PRODUCT CODE	MKS5
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.22
DIMENSIONS (mm) A x B x C	45 x 55 x 15

PRODUCT CODE	MKS8
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.26
DIMENSIONS (mm) A x B x C	42 x 110 x 70

PRODUCT CODE	MKO5
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) A x B x C	45 x 72 x 22

PRODUCT CODE	MKB514
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.26
DIMENSIONS (mm) A x B x C	42 x 85 x 40

PRODUCT CODE	MKB614
PAN SPIGOT OUTER DIAMETER (mm)	76 – 95
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.25
DIMENSIONS (mm) A x B x C	37 x 90 x 40

TRUST MULTIKWIK

All Multikwik WC connectors are supplied with a sachet of lubricant to ease the installation – with the exception of our adjustable and rigid connectors.




WC CONNECTORS / ANCILLARIES

PIPE 1: Standard 99-105mm 2: Cast Iron 88-92mm 3: Old 74-77mm 4: Copper 105-108mm:

 SOIL PIPE EXTENSION
FOR 4" SOIL

MKEA

1




- Can be cut to required length
- Ideal when removing 4" cast iron, clay and PVCu

PRODUCT CODE	MKEA
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.24
DIMENSIONS (mm) A x B	50 x 202

 SOIL PIPE EXTENSION
FOR 3½" SOIL

MKEB

2




- Can be cut to required length
- Ideal when removing 3½" cast iron

PRODUCT CODE	MKEB
SOIL PIPE INNER DIAMETER (mm)	88 – 92
WEIGHT (KG)	0.22
DIMENSIONS (mm) A x B	50 x 202

 SOIL PIPE EXTENSION
FOR 3" SOIL

MKEG

3




- Can be cut to required length
- Ideal when removing 3" cast iron

PRODUCT CODE	MKEG
SOIL PIPE INNER DIAMETER (mm)	74 – 77
WEIGHT (KG)	0.21
DIMENSIONS (mm) A x B	42 x 210

 RIGID SOIL
PIPE EXTENSION

MKREXT

1




- Adjustable length: remove the fined seal and cut with a fine tooth saw

PRODUCT CODE	MKREXT
PAN SPIGOT OUTER DIAMETER (mm)	97 – 108
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.23
DIMENSIONS (mm) A x B	35 x 264

 FLUSH PIPE
CONNECTOR

MKFPC1

1




PRODUCT CODE	MKFPC1
SOIL PIPE INNER DIAMETER (mm)	–
WEIGHT (KG)	0.02
DIMENSIONS (mm) A x B	65 x 26

MULTILINK

MKL1

1



- For connecting 2 or more pan connectors
- Suitable for sleeving the fins of all 99 – 105mm Multikwik outlets

PRODUCT CODE	MKL1
SOIL PIPE INNER DIAMETER (mm)	99 – 105
WEIGHT (KG)	0.04
DIMENSIONS (mm) A	52.5